



FLOATING HEAD GREENS MOWER LM101

A CUT ABOVE PERFECTION

BARONESS



MOW UNIFORMLY FROM BEGINNING TO END.

All golf greens should be consistent in their condition and play. With the LM101, Baroness aims to provide the best tool for achieving these objectives.

For the new LM101 Greens mower, Baroness focused on improving its design and engineering.

The mower unit is now independent from the drive unit, so that it can follow the greens without being affected by the operator. The grass catcher is also independent from the mower unit. Even if the amount of grass clippings, thatch and sand increases in the grass catcher, it does not affect the cutting angle of the mower unit, preventing the cutting height from fluctuating and allowing the mower to mow greens evenly.

The distance between the front and rear rollers is designed to prevent scalping and minimize damage to the turf. The durable blades, made of Baroness's own special steel, contribute to both a beautiful aftercut appearance and higher turf quality, thus achieving ideal greens.

For 30 years, Baroness has been developing and designing the floating head greens mower. The LM101 is Baroness's best floating head greens mower to date.

WORLD-RENOWNED SHARPEST BLADES

Equipped with the world-renowned Baroness reel cutter, the LM101 can mow any types of grass beautifully. Cleanly cut grass is less vulnerable to disease and has healthy growth.

INDEPENDENT GRASS CATCHER

The grass catcher is independent from the mowing unit. Even if the amount of grass clippings, thatch, and sand increases in the grass catcher, it does not affect the cutting angle of the mower unit. Thus, the mower can mow uniformly from beginning to end.



GROOMER AND ROTARY BRUSH

Optional attachments are available. All of the optional attachments are bi-directional. The end user can choose either forward rotation or reverse rotation with a simple switch of a lever.



ROTARY BRUSH

This benefits the green by smoothing out the green's turf, eliminating debris and removing morning dew.

GROOMER

This has the benefit of straightening the turf and standing up laid down grass to cut. The recommended regular rotation is forward.

These options can be operated in either forward or reverse direction according to the intended use.

DRUM

You can select the type of drum which corresponds to greens conditions.



D (Dimple) Drum

Because of the dimpled surface, the drum does not slip easily, and its climbing ability is superior to the ND drum. This drum ensures a stronger grip on two-step greens or on slippery greens.



ND (No Dimple) Drum

Because the drum surface is smooth and dimple free, the load on the turf surface is uniform. This drum leaves the smoothest after-cut appearance.

*Special order item only

FREQUENCY OF CUT (HIGH/LOW CLIP)

The frequency of cut (high/low clip) can be changed easily with a single switch of a lever. You can change the clip pitch according to the type and condition of the turf. (See separate chart.)

| | | High clip | Low clip |
|------------------|----------|------------|------------|
| Reel RPMS | | 1,800 | 1,400 |
| FOC (Clip pitch) | 9 Blade | 4.8 mm/cut | 5.7 mm/cut |
| | 11 Blade | 3.9 mm/cut | 5.1 mm/cut |
| Operating Speed | | 4.7 km/h | |

LIGHT

Equipped with a LED light, the LM101 allows the operator to work in the early morning or at dusk.

INDEPENDENT MOWER UNIT


The mower unit is independent from the drive unit. The operator's steering does not affect the mower unit's stability. Thus, the unit's load is always constant no matter who operates the machine, allowing the mower to mow evenly at a constant height of cut. The mower unit can be attached and detached easily without using a tool.

PREVENT SCALPING

With the lightest-weight mower unit, and the smallest pitch between rollers, the LM101 has the lowest risk of scalping and can mow greens with severe undulations.



LM101 SPECIFICATIONS

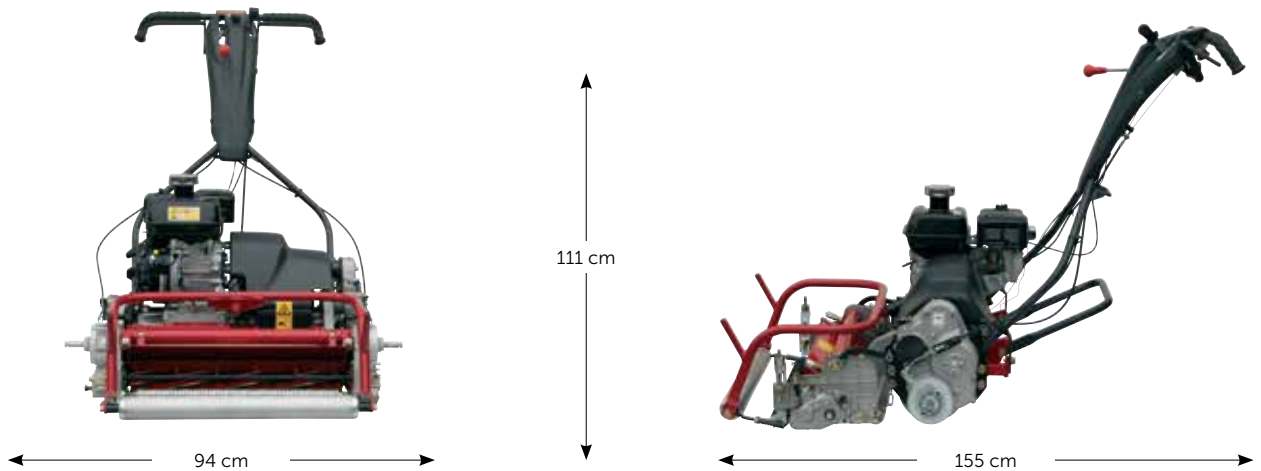

| | | |
|---|---|---|
| Dimensions | Total length with grass catcher | 155 cm |
| | Total width without travelling wheel | 94 cm |
| | Total height Steering handle | 111 cm |
| Weight | Total weight (empty fuel tank) | 114 kg |
| | Grass catcher *1 | 3.3 kg |
| | Groomer *1 | 3.6 kg |
| | Travelling wheel (for one machine) *1 | 6.9 kg |
| Engine | Model | Honda GX120 |
| | Type | 4-stroke, overhead valve, single cylinder |
| | Total Displacement | 7.20 cu.in. 118cm ³ (0.118 L) |
| | Maximum output | 2.6 kW (3.5 PS)/3,600 rpm |
| Operating width (Mowing width) | 55.7 cm | |
| Operating height (Mowing height) | 3.0 - 29.0 mm [3.0 - 27.0 mm] *2 | |
| Blades | 9, 11 | |
| Drive | Travelling | Mechanical |
| | Mowing | Mechanical |
| Speed (Mechanical) | 4.7 km/h (@3,000 rpm) 2.92 mph (@3,000 rpm) | |
| Efficiency | 0.52 acres/hour | 2,094 m ² /h |
| | (2.92 mph x mowing width x 0.8) | (4.7 km/h x mowing width x 0.8) |
| Tire size | 4.10/3.50-6 | |
| Pneumatic pressure | 1740 psi / 120 kPa (1.2 kgf/cm ²) | |

* The factory default maximum engine rpm is 3,100rpm.

*1 : Total weight includes *1 parts.

*2 : The indicated lowest mowing height is for general application. It may be adjusted according to the state of green and the bed knife to be installed. The value in brackets [] is the mowing height of the machine equipped with a groomer.

Kubota Australia

25 - 29 Permas Way,
Truganina, Victoria, 3029 Australia
Freecall: 1800 334 653
E: sales@kubota.com.au
W: kubota.com.au

Kubota New Zealand

15A Bennet Street,
Cloverlea, Palmerston North, 4412
Freecall: 0800 582 682
E: sales@kubota.co.nz
W: kubota.co.nz

For Earth, For Life
Kubota